

PRODUCT SPECIFICATION

16*2 Characters COB LCD MODULE MODEL: LT-1602F1-891 Ver:1.0

< \diamond > Finally Specification

CUSTOMER'S APPROVAL								
CUSTOMER :								
SIG	NATURE:	DATE:						

APPROVED	PM	PD	PREPARED
BY	REVIEWD	REVIEWD	Ву

Prepared By: LEADER TIME SRL VIA MONS. PROSDOCIMI, 27 36042 BREGANZE (VI)

• This specification is subject to change without notice. Please contact LT or it's representative before designing your product based on this specification.

Revision Status

Version	Revise Date	Page	Content	Modified By
Ver1.0	2011.01.04		First Issued	
1				

Table of Contents

No. Contents

Page

1. FEATURES4
2. MECHANICAL SPECIFICATIONS
3. ELECTRICAL SPECIFICATIONS4
4. TERMINAL FUNCTIONS AND BLOCK DIAGRAM6
5. TIMING CHARACTERISTICS
6. COMMAND LIST
7. CHARACTER GENERATOR ROM9
8. QUALITY SPECIFICATIONS
9. RELIABILITY15
10. HANDLING PRECAUTION16
11. OUTLINE DIMENSION

1. FEATURES

The features of LCD are as follows

- * Display mode : STN/ Blue/Transmissive/Negative
- * Controller IC :ST7066U-0A(English-Japanese)
- * Display format : 16*2 Characters
- * Interface
- : 4-Bit or 8-Bit MPU ethod : 1/16Duty, 1/5Bias
- * Driving Method* Viewing Direction
- 6 O'clock
- : LED
- *Sample NO.

* Backlight

- : LED /White
- : EC1602C5SGW6B –B0_01/20101231

2. MECHANICAL SPECIFICATIONS

ltem	Specification	Unit
Module Size	80(W) x 36(H) x 9.5MAX(D)	mm
View display area	64.5(W) x16(H)	mm
Activity Display Area	56.21(W) x 11.5 (H)	mm
Character Font	5x8 Dots	-
Character Size	2.96(W) x 5.56(H)	mm
Character Pitch	3.55(W) x 5.94(H)	mm
Dots Size	0.56(W) x0.66(H)	mm

3. ELECTRICAL SPECIFICATIONS 3-1 ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

ltom	Symbol	Sta				
ltem	Symbol	Min.	Тур.	Max. 7.0 Vcc +0.3 Vcc+0.3 +70	Unit	
Supply Voltage For Logic	Vdd – Vss	-0.3	-	7.0	V	
Supply Voltage For LCD Drive	V _{LCD}	Vcc-10.	-	Vcc +0.3	V	
Input Voltage	Vin	-0.3	-	Vcc+0.3	V	
Operating Temp.	Тор	-20	-	+70	°C	
Storage Temp.	Tst	-30	-	+80	°C	

*. NOTE: The response time will be extremely slow when the operating temperature is around -10 $^{\circ}$ C, and the back ground will become darker at high temperature operating.

3-2 ELECTRICAL CHARACTERISTICS

ltem		Symbol	Test Condition	Min.	Тур.	Max.	Unit		
Logic supply	Voltage	Vdd – Vss		4.5	5	5.5	V		
LCD Drive V	LCD Drive Voltage			4.2	4.5	4.8	V		
	"H" Level	V _{IH}	Ta = 25 °C	0.7 Vcc	-	Vcc	V		
Input Voltage	"L" Level	V _{IL}	$VDD=5V\pm10\%$	-0.3	-	0.6	V		
Frame Freq	Frame Frequency			-	84.7	-	Hz		
Current Const	umption	I _{DD}		-	1.46	-	mA		

3-3 BACKLIGHT

3-3-1. Absolute Maximum Ratings

Item	Symbol	Condition	min	Тур	Max	Unit
Forward Current	IF		-	-	30	mA
Reverse Voltage	VR	Ta = 25 °C	-	-	5	V
Power Dissipation	PD		-	-	96	mW

3-4-2. Electrical-optical Characteristics

ltem	Symbol	Condition	Min.		Min. Typ.		Тур.		Max.		Unit
Forward Voltage	VF		2	.8	3	.1	3	.2	V		
Average Luminous Intensity	lv	lf=30mA Ta = 25 °C	200		280		-		cd/m ²		
Color Coordinate	-	Ta = 25 C	Х	Y	Х	Y	Х	Y	nm		
	-		0.25	0.25	0.28	0.28	0.31	0.31	nm		


The brightness is measured without LCD panel


4.TERMINAL FUNCTIONS AND BLOCK DIAGRAM

4-1. INTERFACE PIN FUNCTION DESCRIPTION


PIN NO.	SYMBOL	FUNCIONS
1	VSS	Ground
2	VDD	Supply voltage for logical circuit
3	V0	Supply voltage for LCD driving
4	RS	A signal for selecting registers. 1: Data Register (for read and write) 0: Instruction Register (for write)
5	R/W	A signal for selecting read or write actions.1: Read, 0: Write.
6	Е	A enable signal for reading or writing data.
7-14	DB0~DB7	8 Bit Data Bus
15	k	Backlight (-)
16	Α	Backlight (+)

4-2. BLOCK DIAGRAM

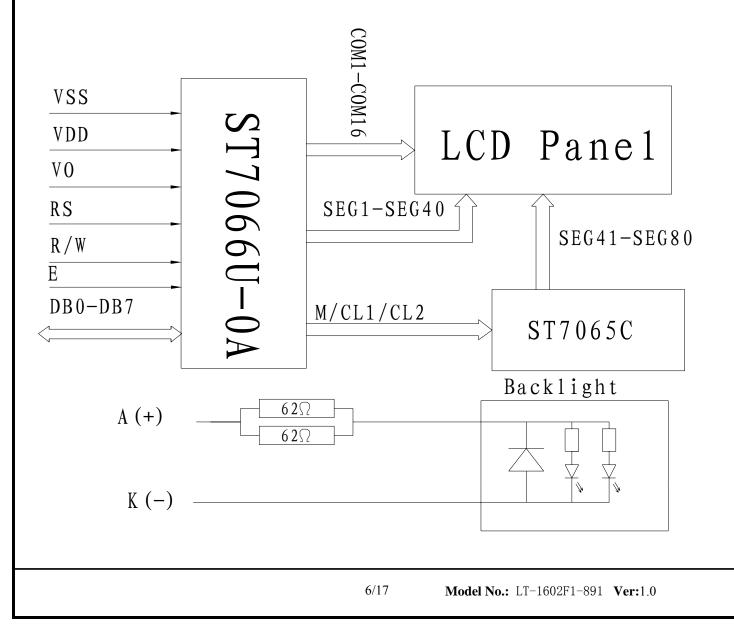

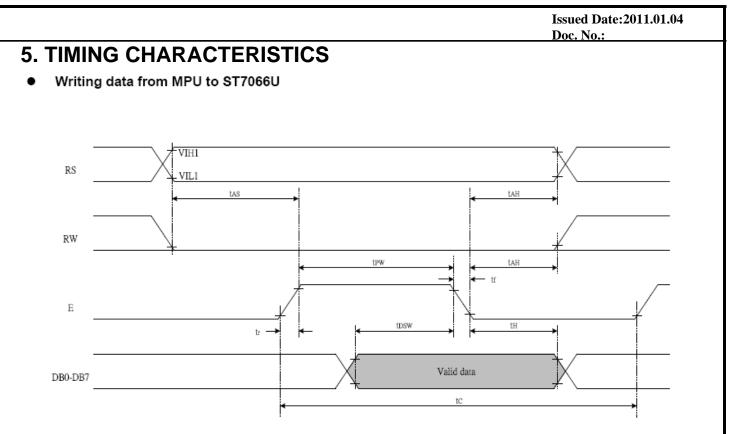



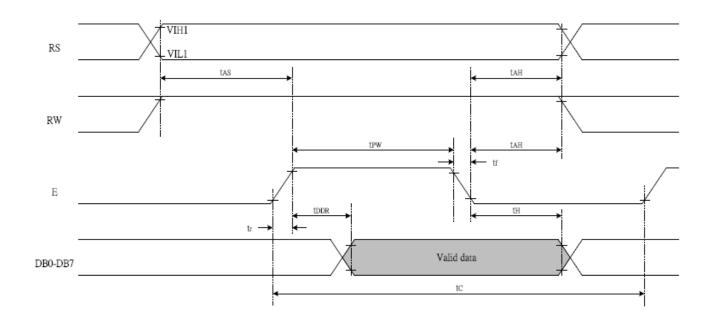

6. COMMAND LIST Instruction Code Description Instruction Description Time RS R/W DB7 DB6 DB5 DB4 DB3 DB2 DB1 DB0 (270KHz) Write "20H" to DDRAM, and Clear 0 0 0 0 0 0 0 set DDRAM address to 1.52 ms 0 0 1 Display "00H" from AC Set DDRAM address to "00H" from AC and return Return 1.52 ms 0 cursor to its original position 0 0 0 0 0 0 0 1 х Home if shifted. The contents of DDRAM are not changed. Sets cursor move direction and specifies display shift. Entry Mode 37 us 0 0 0 0 0 0 0 I/D S These operations are 1 Set performed during data write and read. D=1:entire display on Display ON/OFF 37 us 0 0 0 0 0 0 D С В C=1:cursor on 1 B=1:cursor position on Set cursor moving and Cursor or display shift control bit, and Display 37 us 0 0 0 0 0 1 S/C R/L х х the direction, without Shift changing DDRAM data. DL:interface data is 8/4 bits Function 37 us 0 0 0 0 1 DL Ν F х N:number of line is 2/1 х Set F:font size is 5x11/5x8 Set CGRAM Set CGRAM address in 37 us 0 ACO 0 0 1 AC5 AC4 AC3 AC2 AC1 address address counter Set DDRAM Set DDRAM address in 37 us 0 0 AC6 AC5 AC4 AC3 AC1 ACO 1 AC2 address address counter Whether during internal Read Busy operation or not can be flag and 0 us ΒF 0 AC1 ACO known by reading BF. The 1 AC6 AC5 AC4 AC3 AC2 address contents of address counter can also be read. Write data into internal Write data 37 us 1 0 D7 D6 D5 D4 D3 D2 D1 D0 RAM to RAM (DDRAM/CGRAM) Read data from internal Read data 37 us D7 D5 D3 D2 D0 RAM 1 1 D6 D4 D1 from RAM (DDRAM/CGRAM)


Note:

Be sure the ST7066U is not in the busy state (BF = 0) before sending an instruction from the MPU to the ST7066U. If an instruction is sent without checking the busy flag, the time between the first instruction and next instruction will take much longer than the instruction time itself. Refer to Instruction Table for the list of each instruction execution time.

7.CHARACTER GENERATOR ROM

NO.7066-0A

NU.7 67-64 63-60	0000	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000	CG RAM (1)														
0001	(2)														
0010	(3)														
0011	(4)														
0100	(5)														
0101	(6)														
0110	(7)														
0111	(8)														
1000	(1)														
1001	(2)														
1010	(3)														
1011	(4)														
1100	(5)														
1101	(6)														
1110	(7)														
1111	(8)														

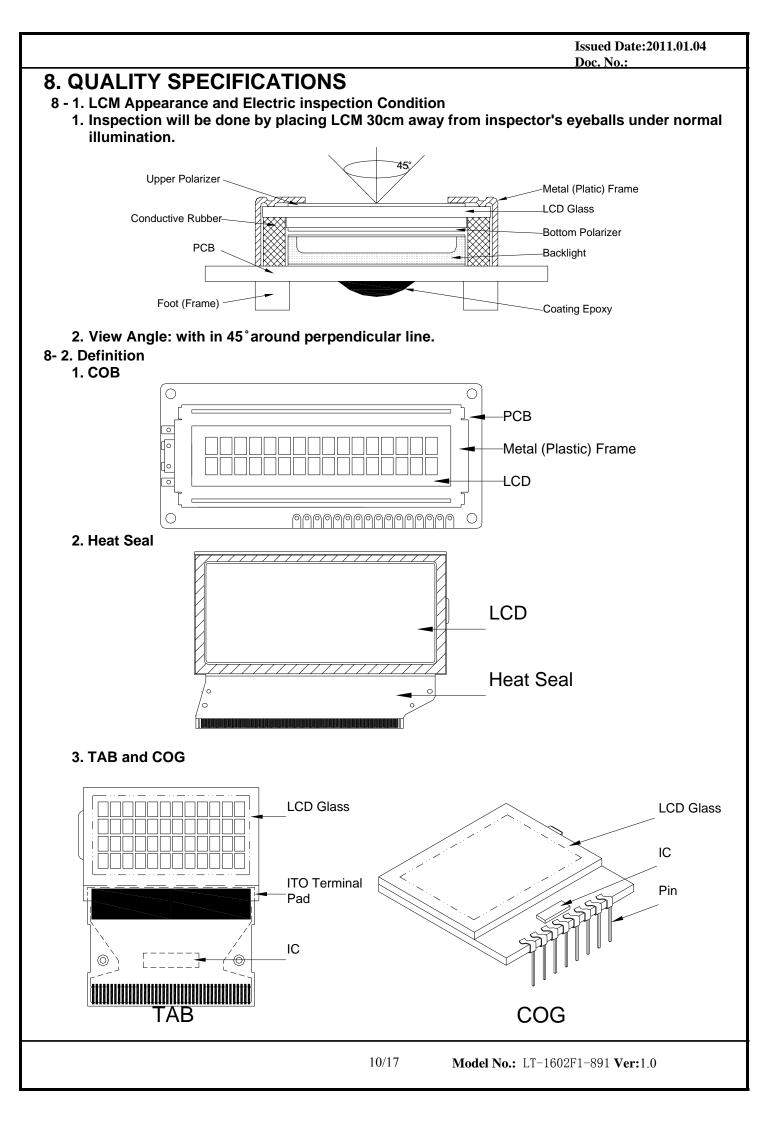

8-3. Sampling Plan and Acceptance

1.Sampling Plan

MIL - STD - 105E (\parallel) ordinary single inspection is used.

2.Acceptance		
Major defect:	AQL = 0.6	5%
Minor defect:	AQL = 1.5	%

8-4. Criteria

1.000				
Defect	Inspection Item	Inspection Standards		
Major	PCB copper flakes peeling off	Any copper flake in viewing Area should be greater than 1.0mm ²	Reject	
Major	Height of coating epoxy	Exceed the dimension of drawing	Reject	
Major	Void or hole of coating epoxy	Expose bonding wire or IC	Reject	
Major	PCB cutting defect	Exceed the dimension of drawing	Reject	

<u>2. SMT</u>

Defect	Inspection Item	Inspection Standa	ards
Minor	Component marking not readable		Reject
Minor	Component height	Exceed the dimension Of drawing	Reject
Major	Component solder defect (missing, extra, wrong component or wrong orientation		Reject
Minor	Component position shift x component soldering pad x \rightarrow x	X < 3/4Z Y > 1/3D	Reject Reject
Minor	Component tilt component D soldering pad	Y > 1/3D	Reject
Minor	Insufficient solder component PAD PCB	<i>θ</i> ≤ 20°	Reject

			Doc. No.:			
Metal (Plastic) Frame						
Inspection Item	Inspection Standards					
Crack / breakage	Any	/where	Reject			
	W	L	Acceptable of Scratch			
	w<0.1mm	Any	Ignore			
	0.1 <u><</u> w<0.2mm	L <u><</u> 5.0mm	2			
Frame Scratch	0.2 <u><</u> w<0.3mm	L <u><</u> 3.0mm	1			
	w <u>></u> 0.3mm	Any	0			
	2. Scratch	on the back sid				
			Acceptable of Dents / Pricks			
	Ф <u><</u>	1.0mm	2			
Frame Dent, Prick	1.0<⊕ <u><</u> 1.5mm 1.5mm<⊕		1			
$\Phi = \frac{L + W}{1 + W}$			0			
2	Note : 1. Above criteria applicable to any two den / pricks with distance greater than 5mm 2. Dent / prick on the back side of frame (no visible) can be ignored					
Frame Deformation	Exceed the dimension of drawing					
Metal Frame Oxidation	Any rust					
	Inspection ItemCrack / breakageFrame ScratchFrame Dent , Prick $\Phi = \frac{L+W}{2}$ Frame Deformation	Inspection ItemInspection ItemCrack / breakageAnyCrack / breakageAnyWWw<0.1mm	Inspection ItemInspection StandarCrack / breakageAnywhereWLw<0.1mm			

4. Flexible Film Connector (FFC)

Defect	Inspection Item	Inspection Standa	rds
Minor	Tilted soldering	Within the angle +5°	Acceptable
Minor	Uneven solder joint /bump		Reject
		Expose the conductive line	Reject
Minor	Hole $\Phi = \frac{L+W}{2}$	Φ > 1.0mm	Reject
Minor	Position shift $Y \xrightarrow{-\frac{1}{2}} \xrightarrow{-\frac{1}{2}$	Y > 1/3D	Reject
Minor		X > 1/2Z	Reject

5. Screw

Defect	Inspection Item	Inspection Standards	
Major	Screw missing/loosen		Reject
Minor	Screw oxidation	Any rust	Reject
Minor	Screw deformation	Difficult to accept screw driver	Reject

6. Heatseal 、 TCP 、 FPC

Defect	Inspection Item	Inspection Standards	
Major	Scratch expose conductive layer		Reject
Minor	HS Hole $\Phi = \frac{L + W}{2}$	Φ > 0.5mm	Reject
Major	Adhesion strength	Less than the specification	Reject
Minor	Position shift $Y \xrightarrow{-\frac{1}{2}} \xrightarrow{-\frac{1}{2}$	Y > 1/3D	Reject
MILIO		X > 1/2Z	Reject
Major	Conductive line break		Reject

7. LED Backing Protective Film and Others

Defect	Inspection Item	Inspection Standards		
		Acceptable number of units		
		⊕ <u><</u> 0.10mm	Ignore	
		0.10<⊕ <u><</u> 0.15mm	2	
Minor	LED dirty, prick	0.15<⊕ <u><</u> 0.2mm	1	
		⊕>0.2mm	0	
		The distance between any two spots should be \geq Any spot/dot/void outside of viewing area is acce		
Minor	Protective film tilt	Not fully cover LCD R		
Major	COG coating	Not fully cover ITO circuit Re		

8. Electric Inspection

Defect	Inspection Item	Inspection Standards	
Major	Short		Reject
Major	Open		Reject

Defect	Inco	oot Itom			In	nontia	~ C	tonderd			
Defect	Insp	ect Item				spection		tandards			
		* Glass Scratch	W	W W <u><</u> 0.03 L L<5		0.			V>0.05		
Minor	Linear Defect	* Polarizer Scratch	ACC.		L	<5		L<3		Any	
		* Fiber and Linear	NO.			1		1		Reject	
		material	Note	L is th	ne ler	ngth and V	V is th	ne width of	the de	fect	
		* Foreign material	Φ	Φ <u><</u>	0.1	0.1<⊕ <u><</u> 0	0.15	15 0.15<Φ <u><</u> 0.2		⊕>0.2	
		between glass and		3E/ 100n	۹/	2		1		0	
Minan	Black Spot and		NO.	100n	nm ⁻					-	
Minor	Polarizer Pricked	and glass Polarizer hole or 		Δ is t	ho a	verane dia	amoto	er of the de	fort		
	THEREU	protuberance by	Note			-		fects > 10n			
		external force									
		* Unobvious	Ŧ		Φ <u><</u> (0.3	0.3	8<⊕ <u><</u> 0.5	0.	5< Φ	
		transparant foreign	ACC.	25	N / A (00mm ²		4		^	
	White Spot	material between	NO.	3E/	4/10	Jomm		1		0	
Minor	and Bubble in	glass and glass or glass and polarizer									
	polarizer	* Air protuberance	Note					ter of the defect.			
		between polarizer		Distance between two defects > 10mm.							
		and glass									
	Segment Defect		Φ	⊕ <u><</u> 0	.10	0.10<⊕ <u><</u> 0.20		0.20<⊕ <u><</u> 0.25		Φ >0 .	
			ACC.	3EA	۸/					_	
			NO.	3EA 100m	nm²	2		1		0	
Minor		Segment		W is more than 1/2 segment width				Reje			
IVIINOI		Defect									
			Note								
					$\Phi = \frac{L + W}{2}$						
				Distar	nce b	etween tv	vo de	fect is 10m	m		
			Φ	⊕ <u><</u> 0	.10	0.10<Φ <u><</u>	<0.20	0.20<⊕ <u><</u> 0.25		Φ>0.	
		Ţŀ []				W <u><</u> 1/2			W-1/2 Sea		
	Protuberant	w X	W	Glu	ie	W <u><</u> 0.		W <u><</u> 0		Ignor	
Minor	Segment										
		$\Phi = (L + W) / 2$	ACC. NO.	3EA 100m	λ / m^2	$\frac{1}{2}$ 2		1		0	
		$\Psi = (L + VV) / Z$			10011						
			1. Seg	ment							
		Ų Į	E		B<	0.4mm	0.4 <b<u><1.0mm</b<u>		B>1	I.0mm	
		()				-					
Minor	Assembly			-A B-A<1/2B			B-A<0.2 B-A		<0.25		
	Mis-alignment	┝ᡖ┥╶┥┝╌	Juc	lge	Acc	ceptable	Ac	ceptable	Acce	eptable	
			2. Dot Matrix								
			Defe	rmetic	a. 00					Dair	
				rmatio						Reje	
Minor	Stain on LCD							ed lightly w			
Minor	Panel Surface		or a similar one. Otherwise, judged accordin above items: "Black spot" and "White Spot"			y to t					

9. RELIABILITY

NO.	ltem	Condition	Criterion
1	High Temperature Operating	70℃, 96Hrs	
2	Low Temperature Operating	-20℃, 96Hrs	
3	High Humidity	50℃, 90%RH, 96Hrs	
4	High Temperature Storage	80℃, 96Hrs	
5	Low Temperature Storage	-30℃, 96Hrs	No defect in cosmetic and
6	Vibration	Random wave 10 ~ 100Hz Acceleration: 2g 2 Hrs per direction(X,Y,Z)	operational function allowable. Total current Consumption should be below double of initial value.
7	Thermal Shock	-20℃ to 25℃ to 70℃ (60Min) (5Min) (60Min) 16Cycles	
8	ESD Tooting	Contract Discharge Voltage: +1 ~ 5kV and -1 ~ -5kV	There will be discharged ten times
ŏ		Air Discharge Voltage: +1 ~ 8kV and -1 ~ -8kV	at every discharging voltage cycle. The voltage gap is 1kV.

Note: 1) Above conditions are suitable for our company standard products.

2) For restrict products, the test conditions listed as above must be revised.

10. HANDLING PRECAUTION

(1) Mounting Method

The panel of the LCD Module consists of two thin glass plates with polarizers which easily get damaged since the Module is fixed by utilizing fitting holes in the printed circuit board. Extreme care should be taken when handling the LCD Modules.

- (2) Caution of LCD handling & cleaning
 - When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.
 - Isopropyl alcohol
 - Ethyl alcohol
 - Trichloro trifloro thane

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface. Do not use the following solvent:

- Water
- Ketone
- Aromatics
- (3) Caution against static charge
 - The LCD Module use C-MOS LSI drivers, so we recommend that you connect any unused input terminal to VDD or VSS, do not input any signals before power is turned on. And ground your body, Work/assembly table. And assembly equipment to protect against static electricity.
- (4) Packaging
 - Modules use LCD elements, and must be treated as such. Avoid intense shock and falls from a height.
 - To prevent modules from degradation. Do not operate or store them exposed directly to sunshine or high temperature/humidity.
- (5) Caution for operation
 - It is indispensable to drive LCD's within the specified voltage limit since the higher voltage than the limit shorten LCD life. An electrochemical reaction due to direct current causes LCD deterioration, Avoid the use of direct current drive.
 - Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's. Which will come back in the specified operating temperature range.
 - If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
 - A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.
 - Usage under the relative condition of 40°C, 50%RH or less is reequired.

(6) Storage

- In the case of storing for a long period of time (for instance.) For years) for the purpose or replacement use, The following ways are recommended.
 - Storage in a polyethylene bag with sealed so as not to enter fresh air outside in it, And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is. Keeping temperature in the specified storage temperature range.
- Storing with no touch on polarizer surface by the anything else. (It is recommended to store them as they have been contained in the inner container at the time of delivery)
- (7) Safety
 - It is recommendable to crash damaged or unnecessary LCD into pieces and wash off liquid crystal by using solvents such as acetone and ethanol. Which should be burned up later.
 - When any liquid crystal leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

