

### **LEADER TIME SRL**

# PRODUCT SPECIFICATION

# 16\*2 Characters COB LCD MODULE MODEL: LT-1602F-812 Ver:5.0

< >> Finally Specification

	CUSTOMER'S	SAPPROVAL
CUSTOMER:		
SIG	NATURE:	DATE:

APPROVED	PM	PD	PREPARED
ВҮ	REVIEWD	REVIEWD	Ву

# Prepared By: LEADER TIME SRL VIA MONS. PROSDOCIMI, 27

36042 BREGANZE (VI)

I This specification is subject to change without notice. Please contact LT or it's representative before designing your product based on this specification.

Issued Date:2010/04/24 Doc. No.:

D N

# **Revision Status**

Version	Revise Date	Page	Content	Modified By
Ver5.0	2010-04-24		First Issued	

D N

**Model No.:** LT-1602F-812 **Ver:5**.0

# **Table of Contents**

No. Contents	Page
1. FEATURES	4
2. MECHANICAL SPECIFICATIONS	4
3. ELECTRICAL SPECIFICATIONS	4
4. TERMINAL FUNCTIONS AND BLOCK DIAGRAM	6
5. TIMING CHARACTERISTICS	7
6. COMMAND LIST	8
7. CHARACTER GENERATOR ROM	9
8. QUALITY SPECIFICATIONS	10
9. RELIABILITY	15
10. HANDLING PRECAUTION	16
11. OUTLINE DIMENSION	17

) N

#### 1. Features

The features of LCD are as follows

\* Display mode : STN/ Blue/ Transmissive, Negative

\* Controller IC :ST7066U-0B(European)

\* Display format : 16\*2 Characters

\* Interface Input Data : 8 -Bits

\* Driving Method : 1/16Duty, 1/5Bias

\* Viewing Direction : 6 O'clock \* Backlight : LED /White

\*Sample NO. :EC1602A1SGW6B-5.0/20100422

#### 2. MECHANICAL SPECIFICATIONS

Item	Specification	Unit
Module Size	80(W) x 36(H) x 10.7(D)Max	mm
View display area	64 (W) x16(H)	mm
Activity Display Area	56.21(W) x 11.50(H)	mm
Character Font	5x8 Dots	-
Character Size	2.96(W) x 5.56(H)	mm
Character Pitch	3.55(W) x 5.94(H)	mm
Dots Size	0.56(W) x0.66(H)	mm

#### 3. ELECTRICAL SPECIFICATIONS

3-1 ABSOLUTE MAXIMUM RATINGS (Ta = 25 °C)

ltem	Symbol	Sta	ndard Va	alue	
item	Symbol	Min. Typ.		Max.	Unit
Supply Voltage For Logic	VDD - Vss	-0.3	-	7	V
Supply Voltage For LCD Drive	$V_{LCD}$	VDD -15	-	VDD +0.3	V
Input Voltage	Vin	-0.3	-	VDD+0.3	V
Operating Temp.	Тор	-20	ı	+70	°C
Storage Temp.	Tst	-30	-	+80	°C

<sup>\*.</sup> NOTE: The response time will be extremely slow when the operating temperature is around -10 $^{\circ}$ C, and the back ground will become darker at high temperature operating.

#### 3-2 ELECTRICAL CHARACTERISTICS

Item	Logic supply Voltage  LCD Drive Voltage  "H" Level		Test Condition	Min.	Тур.	Max.	Unit
Logic supply	Logic supply Voltage			4.5	5	5.5	V
LCD Drive Voltage		$V_{LCD}$	Ta = 25 °C	3.6	3.9	4.2	V
	"H" Level	V <sub>IH</sub>	VDD=5V ± 10%	2.2	-	VDD	V
Input Voltage	"L" Level	V <sub>IL</sub>	7 VDD=3V ± 10%	-0.3	-	0.6	V
Frame Frequency		f <sub>FLM</sub>	VDD = 5V	-	84.3	-	Hz
Current Cons	umption	I <sub>DD</sub>		-	1.45	-	mA

#### 3-3. BACKLIGHT

3-3-1. Absolute Maximum Ratings

Item	Symbol	Condition	min	Тур	Max	Unit
Forward Current	IF		-	30	40	mA
Reverse Voltage	VR	Ta = 25 °C	-	-	5	V
Power Dissipation	PD		-	132	-	mW

3-4-2. Electrical-optical Characteristics

Item	Symbol	Condition	mi	n	Тур			ax	Unit
Forward Voltage	VF		2.	9	3.	.1	3.3		V
Average Luminous Intensity	lv	lf=40mA	23	0	32	20			cd/m <sup>2</sup>
Colour Coordinates		Ta = 25 °C	Х	Υ	Χ	Υ	Х	Υ	
Colour Coordinates			0.25	0.25	0.28	0.28	0.31	0.31	-


The brightness is measured without LCD panel

**Model No.:** LT-1602F-812 **Ver:5**.0


#### 4-1. INTERFACE PIN FUNCTION DESCRIPTION

PIN NO.	SYMBOL	FUNCIONS
1	vss	Ground
2	VDD	Supply voltage for logical circuit
3	V0	Supply voltage for LCD driving
4	RS	Select register signal
5	R/W	Select read or wiet signal
6	E	Enable signal.
7-14	DB0-DB7	Data Bus
15	LEDA	Backlight unit anode
16	LEDK	Backlight unit kathode

#### 4-2. BLOCK DIAGRAM

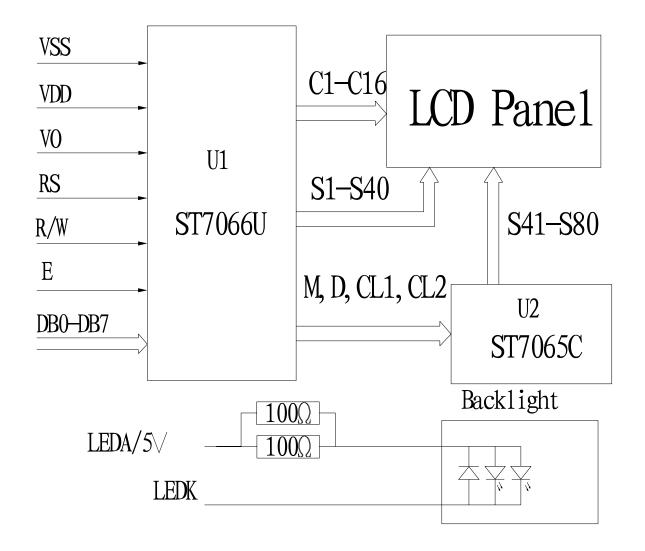

# 5. TIMING CHARACTERISTICS

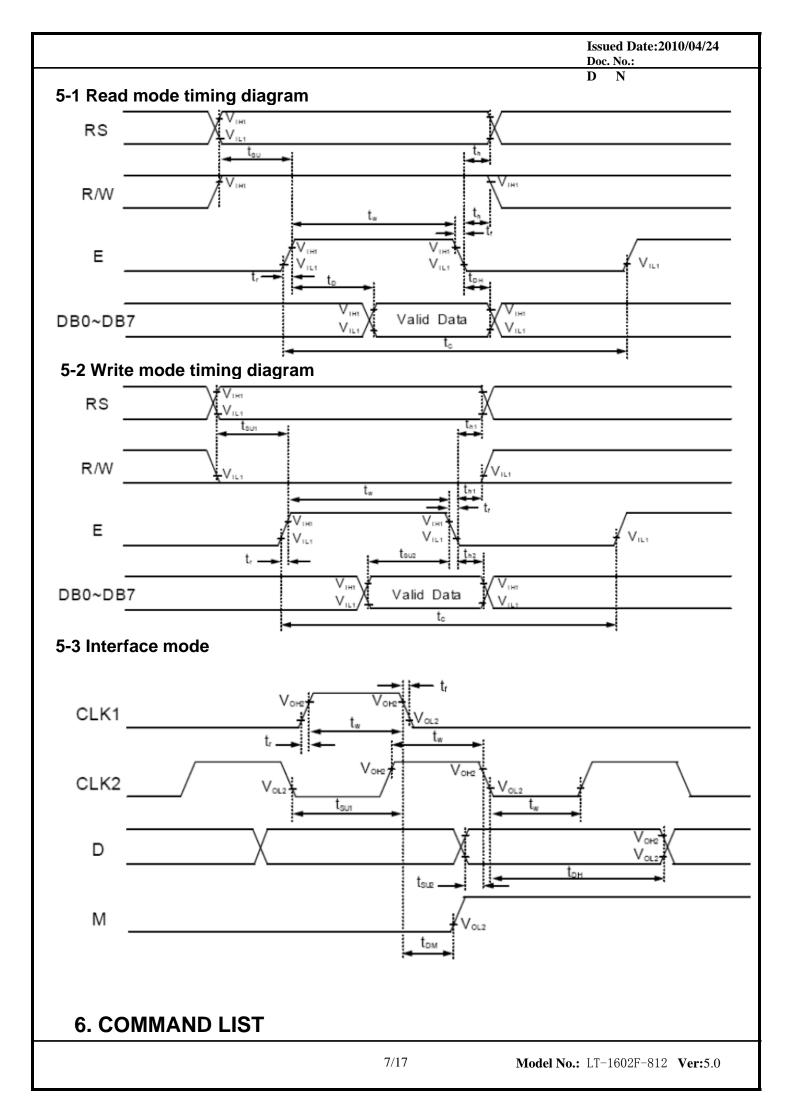

Instruction				Inst	ructi	on C	ode				Description	Execution time (fosc=
mstruction ·	RS	R/W	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0	Description	270 kHz)
Clear Display	0	0	0	0	0	0	0	0	0	1	Write "20H" to DDRAM and set DDRAM address to "00H" from AC	1.53 ms
Return Home	0	0	0	0	0	0	0	0	1	-	Set DDRAM address to '00H" from AC and return cursor to its original position if shifted. The contents of DDRAM are not changed.	1.53 ms
Entry Mode Set	0	0	0	0	0	0	0	1	I/D	SH	Assign cursor moving direction and enable the shift of entire display.	39 μs
Display ON/ OFF Control	0	0	0	0	0	0	1	D	С	В	Set display(D), cursor(C), and blinking of cursor(B) on/off control bit.	39 µs
Cursor or Display Shift	0	0	0	0	0	1	S/C	R/L	-	-	Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.	39 µs
Function Set	0	0	0	0	1	DL	N	F	-	-	Set interface data length (DL: 8-bit/4-bit), numbers of display line (N: 2-line/1-line) and, display font type (F:5×11dots/5×8 dots)	39 µs
Set CGRAM Address	0	0	0	1	AC5	AC4	AC3	AC2	AC1	AC0	Set CGRAM address in address counter.	39 µs
Set DDRAM Address	0	0	1	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Set DDRAM address in address counter.	39 μs
Read Busy Flag and Address	0	1	BF	AC6	AC5	AC4	AC3	AC2	AC1	AC0	Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.	0 μs
Write Data to RAM	1	0	D7	D6	D5	D4	D3	D2	D1	D0	Write data into internal RAM (DDRAM/CGRAM).	43 μs
Read Data from RAM	1	1	D7	D6	D5	D4	D3	D2	D1	D0	Read data from internal RAM (DDRAM/CGRAM).	43 μs

\* "-". dont care

NOTE: When an MPU program with checking the Busy Flag(DB7) is made, it must be necessary 1/2Fosc is necessary for executing the next instruction by the falling edge of the 'E' signal after the Busy Flag (DB7) goes to "Low".

# 7.CHARACTER GENERATOR ROM

Issued Date:2010/04/24 Doc. No.:

D N


<u>10.7</u> 67-64]						I				I		1	I	1	I
P3-P0	0000	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
0000	CG RAM (1)														
0001	(2)														
0010	(3)														
0011	(4)														
0100	(5)														
0101	(6)														
0110	7)														
0111	(8)														
1000	(1)														
1001	(2)														
1010	(3)														
1011	(4)														
1100	(5)														
1101	(6)														
1110	(7)														
1111	(8)														

# 8. QUALITY SPECIFICATIONS

) N

#### 8 - 1. LCM Appearance and Electric inspection Condition


1. Inspection will be done by placing LCM 30cm away from inspector's eyeballs under normal illumination.

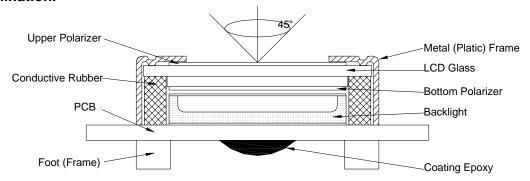


2. View Angle: with in 45° around perpendicular line.

#### 8-2. Definition


1. COB

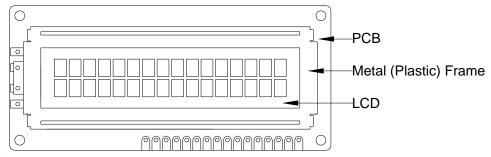

2. Heat Seal

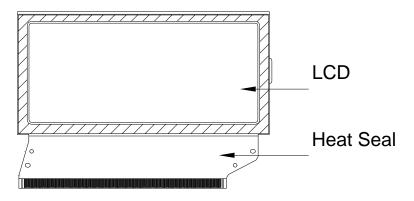

#### 3. TAB and C

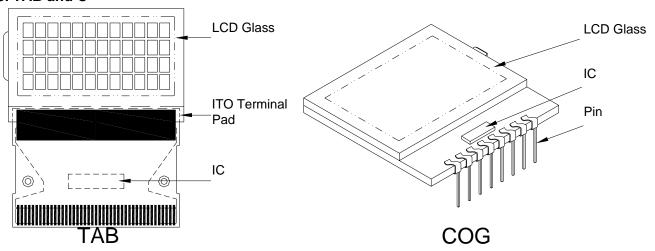

8-3. Sampling Plan and Acceptance

1. Sampling Plan

Doc. No.:

D N

MIL - STD - 105E (  $\parallel$  ) ordinary single inspection is used.

2.Acceptance

Major defect: AQL = 0.25% Minor defect: AQL = 0.65%

#### 8-4. Criteria

#### 1.COB

Defect	Inspection Item	Inspection Standards		
Major	PCB copper flakes peeling off	Any copper flake in viewing Area should be greater than 1.0mm <sup>2</sup>	Reject	
Major	Height of coating epoxy	Exceed the dimension of drawing	Reject	
Major	Void or hole of coating epoxy	Expose bonding wire or IC	Reject	
Major	PCB cutting defect	Exceed the dimension of drawing	Reject	

#### 2.SMT

Defect	Inspection Item	Inspection Standa	ards
Minor	Component marking not readable		Reject
Minor	Component height	Exceed the dimension Of drawing	Reject
Major	Component solder defect (missing, extra, wrong component or wrong orientation		Reject
Minor	Component position shift component soldering pad	X < 3/4Z Y > 1/3D	Reject Reject
Minor	Component tilt component soldering pad	Y > 1/3D	Reject
Insufficient solder component  Minor PAD  PCB		<i>θ</i> ≤ 20°	Reject

#### 3. Metal (Plastic) Frame

D N

Defect	Inspection Item	Inspection Standards				
Major	Crack / breakage	Any	where	Reject		
			L	Acceptable of Scratch		
		w<0.1mm	Any	Ignore		
		0.1 <u>&lt;</u> w<0.2mm	L <u>&lt;</u> 5.0mm	2		
Minor	Frame Scratch	0.2 <u>&lt;</u> w<0.3mm	L <u>&lt;</u> 3.0mm	1		
		w <u>&gt;</u> 0.3mm	Any	0		
		Note: 1. Above criteria applicable to scratch lines with distance greater than 5mm.  2. Scratch on the back side of frame (not visible) can be ignored.				
				Acceptable of Dents / Pricks		
		Ф <u>&lt;</u> 1.0mm		2		
	Frame Dent , Prick	1.0<⊕ <u>&lt;</u> 1.5mm		1		
Minor	$\Phi = \frac{L + W}{2}$	1.5r	0			
	2	Note: 1. Above criteria applicable to any two dent / pricks with distance greater than 5mm 2. Dent / prick on the back side of frame (no visible) can be ignored				
Minor	Frame Deformation	Exceed the dimension of drawing				
Minor	Metal Frame Oxidation	Any rust				

4. Flexible Film Connector (FFC)

Defect	Inspection Item	Inspection Standards			
Minor	Tilted soldering	Within the angle +5°	Acceptable		
Minor	Uneven solder joint /bump		Reject		
		Expose the conductive line	Reject		
Minor	Hole $\Phi = \frac{L + W}{2}$	Ф > 1.0mm	Reject		
Position shift  Y  V  D  Minor		Y > 1/3D	Reject		
WIITIOI	- <del>*</del> - <del>*</del> -	X > 1/2Z	Reject		

#### 5. Screw

Defect	Inspection Item	Inspection Standards	
Major	Screw missing/loosen		Reject
Minor	Screw oxidation	Any rust	Reject
Minor	Screw deformation	Difficult to accept screw driver	Reject

#### 6. Heatseal \ TCP \ FPC

Defect	Inspection Item	Inspection Standards	
Major	Scratch expose conductive layer		Reject
Minor	HS Hole $\Phi = \frac{L + W}{2}$	Φ> 0.5mm	Reject
Major	Adhesion strength	Less than the specification	Reject
Minor	Position shift	Y > 1/3D	Reject
IVIIIIOI		X > 1/2Z	Reject
Major	Conductive line break		Reject

7. LED Backing Protective Film and Others

Defect	Inspection Item	Inspection Standards		
		Acceptable number of units		
	LED dirty, prick	⊕ <u>&lt;</u> 0.10mm	Ignore	
		0.10<⊕ <u>&lt;</u> 0.15mm	2	
Minor		0.15<⊕ <u>&lt;</u> 0.2mm	1	
		Φ>0.2mm	0	
		The distance between any two spots should be ≥ Any spot/dot/void outside of viewing area is accept		
Minor	Protective film tilt	t Not fully cover LCD F		
Major	COG coating	Not fully cover ITO circuit	Reject	

8. Electric Inspection

Defect	Inspection Item	em Inspection Standards					
Major	Short		Reject				
Major	Open		Reject				

D N

9. Inspection Specification of LCD

•	spection Specification of LCD									
Defect	insp	Inspect Item			Inspection Standards					
Minor		* Glass Scratch	W L	W <u>&lt;</u> 0.03 L<5		0.03 <w<0.05 td="" v<=""><td>V&gt;0.05</td></w<0.05>		V>0.05		
	Linear Defect	<ul><li>* Polarizer Scratch</li><li>* Fiber and Linear</li></ul>	ACC. NO.	1					Any Reject	
		material	Note	L is the length and W			/ is th	e width of	the de	fect
		* Foreign material	Φ	Φ<0				0.15<Φ <u>&lt;</u> 0		Φ>0.2
	Black Spot and	between glass and		3EA 100m	/	2		1		0
Minor	Polarizer Pricked	and glass  * Polarizer hole or protuberance by external force	Note	Φ is th	ne a	verage dia etween tw				
		* Unobvious	Φ		Φ <u>&lt;</u> (	0.3	0.3	<⊕ <u>&lt;</u> 0.5	0.	<b>5&lt;</b> ⊕
	White Spot	transparant foreign material between	ACC. NO.	3EA	. / 10	00mm <sup>2</sup>		1		0
Minor and Bubble polarizer		glass and glass or glass and polarizer * Air protuberance between polarizer and glass	Note	$\Phi$ is the average diameter of the defect. Distance between two defects > 10mm.						
	Segment Defect	t	Φ	Φ <u>&lt;</u> 0.	10	0.10<⊕ <u>&lt;</u> 0.20		0.20<⊕ <u>&lt;</u> 0.25		⊕>0.25
			ACC. NO.	3EA 100m	./ m²	2 1			0	
Minor				W is more than 1/2 segment width Reject						
		W	Note	$\Phi = \frac{L + W}{2}$ Distance between two defect is 10mm						
			Φ	Φ <u>&lt;</u> 0.	10	0.10<⊕ <u>&lt;</u> 0.20		0.20<⊕≤	<u>&lt;</u> 0.25	Φ>0.25
N 4 in a n	Protuberant	w W	W	Glue	е	W <u>&lt;</u> 1/2 \$ W <u>&lt;</u> 0.		W <u>&lt;</u> 1/2 W <u>&lt;</u> 0.		Ignore
Minor	Segment	$\Phi = (L + W)/2$	ACC. NO.	3EA 100m	m <sup>2</sup>	2		1		0
			1. Seg	ment						
						_		_		I.0mm
Minor	Assembly		B-			A<1/2B		A<0.2		<0.25
	Mis-alignment		Judge Acceptable Acceptable Acceptable				eptable			
			2. Dot Matrix				1			
				rmation						Reject
Minor	Stain on LCD Panel Surface		Accept when stains can be wiped lightly with a soft cloth or a similar one. Otherwise, judged according to the above items: "Black spot" and "White Spot"							

# 9. RELIABILITY

NO.	Item	Condition	Criterion
1	High Temperature Operating	70°C, 96Hrs	
2	Low Temperature Operating	-20℃, 96Hrs	
3	High Humidity	60°C, 90%RH, 96Hrs	
4	High Temperature Storage	80°C, 96Hrs	
5	Low Temperature Storage	-30℃, 96Hrs	No defect in cosmetic and
	6 Vibration	Random wave	operational function allowable.
6		10 ~ 100Hz	Total current Consumption should be below double of initial value.
		Acceleration: 2g	
		2 Hrs per direction(X,Y,Z)	
		-20°C to 25°C to 70°C	
7	Thermal Shock	(60Min) (5Min) (60Min)	
		16Cycles	
		Contract Discharge Voltage:	
8	ESD Testing	+1 ~ 5kV and -1 ~ -5kV	There will be discharged ten times at every discharging voltage
		Air Discharge Voltage: +1 ~ 8kV and -1 ~ -8kV	cycle. The voltage gap is 1kV.

Note: 1) Above conditions are suitable for our company standard products.

2) For restrict products, the test conditions listed as above must be revised.

) N

#### 10. HANDLING PRECAUTION

#### (1) Mounting Method

The panel of the LCD Module consists of two thin glass plates with polarizers which easily get damaged since the Module is fixed by utilizing fitting holes in the printed circuit board.

Extreme care should be taken when handling the LCD Modules.

#### (2) Caution of LCD handling & cleaning

When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.

- Isopropyl alcohol
- Ethyl alcohol
- Trichloro trifloro thane

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface. Do not use the following solvent:

- Water
- Ketone
- Aromatics

#### (3) Caution against static charge

The LCD Module use C-MOS LSI drivers, so we recommend that you connect any unused input terminal to VDD or VSS, do not input any signals before power is turned on. And ground your body, Work/assembly table. And assembly equipment to protect against static electricity.

#### (4) Packaging

- Modules use LCD elements, and must be treated as such. Avoid intense shock and falls from a height.
- To prevent modules from degradation. Do not operate or store them exposed directly to sunshine or high temperature/humidity.

#### (5) Caution for operation

- It is indispensable to drive LCD's within the specified voltage limit since the higher voltage than the limit shorten LCD life. An electrochemical reaction due to direct current causes LCD deterioration, Avoid the use of direct current drive.
- Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD's show dark color in them. However those phenomena do not mean malfunction or out of order with LCD's. Which will come back in the specified operating temperature range.
- If the display area is pushed hard during operation, some font will be abnormally displayed but it resumes normal condition after turning off once.
- A slight dew depositing on terminals is a cause for electro-chemical reaction resulting in terminal open circuit.

Usage under the relative condition of 40°C, 50%RH or less is reequired.

#### (6) Storage

In the case of storing for a long period of time (for instance.) For years) for the purpose or replacement use, The following ways are recommended.

- Storage in a polyethylene bag with sealed so as not to enter fresh air outside in it, And with no desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is. Keeping temperature in the specified storage temperature range.
- Storing with no touch on polarizer surface by the anything else. (It is recommended to store them as they have been contained in the inner container at the time of delivery)

#### (7) Safety

- It is recommendable to crash damaged or unnecessary LCD into pieces and wash off liquid crystal by using solvents such as acetone and ethanol. Which should be burned up later.
- When any liquid crystal leaked out of a damaged glass cell comes in contact with your hands, please wash it off well with soap and water.

#### 11. OUTLINE DIMENSION

